

WHAT'S INCLUDED

- 1 SOL-ARK CONDUIT BOX
- 1 DRILLING TEMPLATE

HELIOS ESS

Sol-Ark 15K Conduit Box

Simplify Installation. Protect Connections.

The HELIOS ESS Sol-Ark Conduit Box enables a clean, code-compliant connection between HELIOS batteries and the Sol-Ark 15K inverter, streamlining installation.

FAST INSTALLATION

Sol-Ark 15K specific knock outs and quick-connect terminals enable rapid deployment.

INTEGRATED VENTING CHANNEL

Built-in rear spacing and top vent slots maintain unobstructed airflow to the Sol-Ark 15K's ventilation openings.

INSTALLER-FRIENDLY

Lightweight, galvanized steel enclosure mounts securely atop the HELIOS ESS battery.

INTEGRATED LYNK II MOUNTING POINT


Includes internal mounting support for optional LYNK II Communication Gateway (sold separately).

RELIABLE AND SAFE

Lockable enclosure to protect cables, conceal connections, and minimize electrical hazard risk.

SPECIFICATIONS

Height	229.5 mm / 9.04 in
Width	585 mm / 23 in
Depth	285.5 mm / 11.24 in
Weight	6 kg / 13.2 lb
Material	Powder Coated Galvanized Steel Sheet

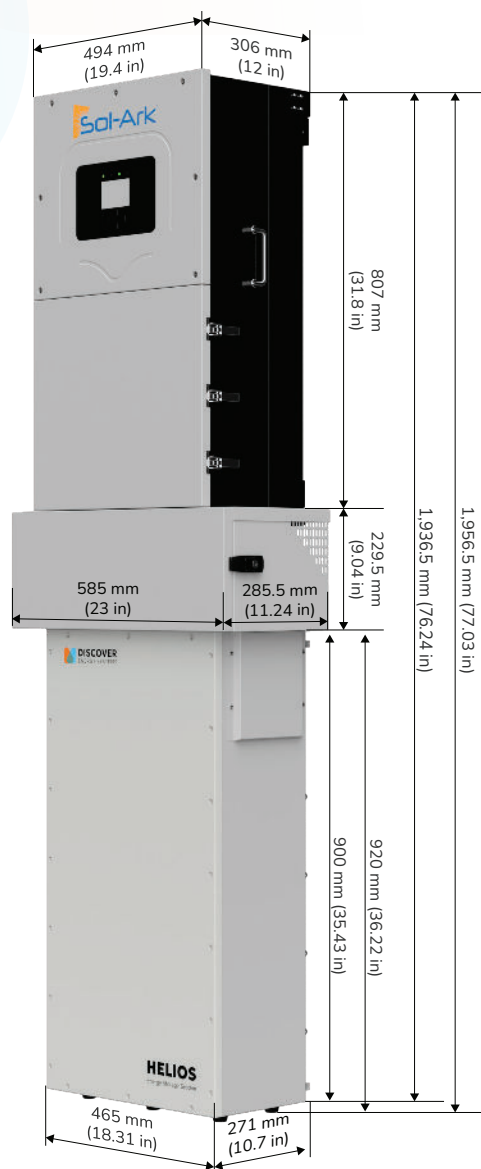

HELIOS ESS

Generic Conduit Box

Simplify Installation. Protect Connections.

The HELIOS ESS Conduit Box enables a clean, code-compliant connection between HELIOS batteries and market-leading inverters, streamlining installation.

FAST INSTALLATION

Universal knockouts and quick-connect terminals enable rapid deployment.

INSTALLER-FRIENDLY

Lightweight, galvanized steel enclosure mounts securely atop the HELIOS ESS battery.

INTEGRATED LYNK II MOUNTING POINT

Includes internal mounting support for optional LYNK II Communication Gateway (sold separately).

RELIABLE AND SAFE

Lockable enclosure to protect cables, conceal connections, and minimize electrical hazard risk.

SPECIFICATIONS

Height	229.5 mm / 9.04 in
Width	585 mm / 23 in
Depth	285.5 mm / 11.24 in
Weight	6 kg / 13.2 lb
Material	Powder Coated Galvanized Steel Sheet

